



24" General Purpose Refrigerated Drawers

Model # MS24RDS**



Drawer-front mounted temperature display and user interface

Standard Features

- 2 extra-large, full-extensions drawers made of easy-to-sanitize and stain-resistant stainless steel
- Insulated thermal-efficient cabinet and drawer fronts ensures optimum efficiency and preservation
- Easy-to-grab full-width handles
- Cam-assisted drawer-close system to reduce "drawer-ajar" events
- Front vented through the toe space grill for true built-in installations
- 1" diameter probe port in rear cabinet wall (standard)
- Bright energy efficient white LED interior lighting for easy content viewing
- Extra-long, jacketed commercial power cord with hospital grade plug to meet stringent hospital and clinical use standards
- CSA Approved and warrantied for commercial use
- Recommended ambient temperature 18.3°C to 32.2°C (65°F to 90°F)
- One lock secures both drawers
- 4 leveling legs for up to 1" height adjustment




Full extension stainless steel drawers

Reliable Temperature Stability & Energy Efficiency

- Advanced forced air evaporator system design with optimized interior cooling air distribution
- Powerful compressor for fast pull-down time and temperature recovery after door opening or content loading
- New energy efficient drawer front gasket system seals in the cold, reducing energy consumption
- Automatic defrost without supplemental heat

MicroSentry™ II Temperature Control

- Drawer-front mounted control for easy access and monitoring
- Accurate electronic temperature control of contents within $\pm 2^{\circ}\text{C}$ of set point.
- Large, easy-to-read digital temperature display with resolution to 0.1°C
- User-selectable temperature set point between +2° and +8°C, factory preset to +4°C
- User-selectable high and low temperature alarm values
- User selectable alarm delay time period
- Visual and audible alarms for over temperature, under temperature, and "drawer-ajar" events
- Alarm silence and automatic ring back function
- Keypad lock-out to prevent unintended control inputs
- Basic high and low temperature logging with reset capability
- Visual diagnostic error codes

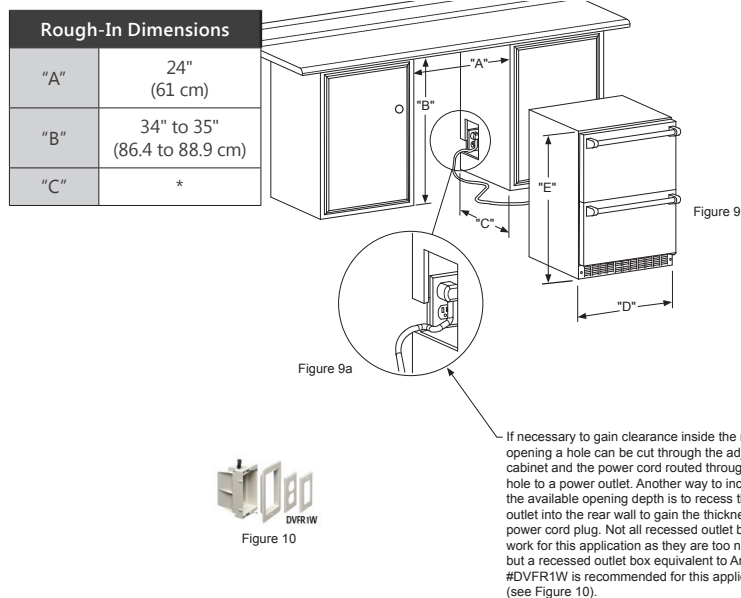

Storage Configuration

(2) extra-deep, full-extension drawers

Product Dimensions



23 ⁷/₈" W x 33 ³/₄" minimum H x 23 ²³/₃₂" D
(excluding door handle)

Finish/Drawer Options



White Cabinet / Stainless Steel Drawers

Cabinet Dimensions	
"D"	23 ⁷ / ₈ " (60.7 cm)
"E"	33 ³ / ₄ " to 34 ³ / ₄ " (85.7 to 88.3 cm)
"F"	23 ²³ / ₃₂ " (60.2 cm)
"G"	26 ⁷ / ₃₂ " (66.6 cm)
"H"	39 ⁵ / ₃₂ " (99.5 cm)

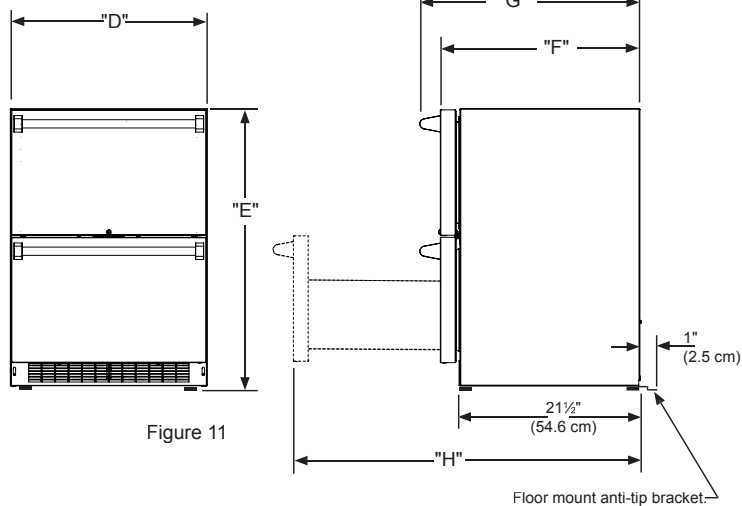

Ordering Details

White Cabinet and Stainless
Steel Drawers with Lock

MS24RDS4NS



Width	23 ⁷ / ₈ "
Interior Drawer Finish	Stainless Steel
Capacity	4.7 Cubic Feet 133 Liters
Shelving System	2 Drawers
Drawer Fronts	White
Interior Lighting	2 LED Pods
Toe Grill Finish	Black
Drawer	Cam-assisted self close
Handle	Full Width

Control Type	MicroSentry™ II
Lock	Yes
Temperature Range	36°F to 46°F (2°C to 8°C)
Electrical Requirements	120V / 60Hz / 15A
Length of Power Cord	5'
Product Dimensions	23 ⁷ / ₈ " W x 33 ³ / ₄ " H x 23 ²³ / ₃₂ " D
Depth to Front of Drawer	23 ²³ / ₃₂ "

Depth to Handle	26 ⁷ / ₃₂ "
Depth with drawer fully extended	39 ⁵ / ₃₂ "
Shipping Weight	135 lbs
Finishes	White/Stainless Steel
Agency Approvals	CSA