




Width	23 7/8"
Interior Finish	White
Total Capacity	5.8 Cubic Feet; 166 Liters
Refrigerator Capacity	4.4 Cubic Feet; 124 Liters
Freezer Capacity	1.4 Cubic Feet; 40 Liters
Toe Grill Finish	Black
Hinge	Cam-assisted self close
Handle	Discrete
Lock	Yes
Temperature Range	Refrigerator: 34°F to 45°F (1°C to 7°C) Freezer: 0°F to 15°F (-18°C to -9°C)
Electrical Requirements	115V / 60Hz / 3.3A
Length of Power Cord	5'
Product Dimensions	23 7/8" W x 34" H x 24" D
Shipping Weight	120 lbs; 142 lbs with skid
Finishes	White
Agency	UL Listed

Ordering Details

Solid White Cabinet and Door
with Lock, Right Hinge

MS24RFS2RW

Rough In Dimensions

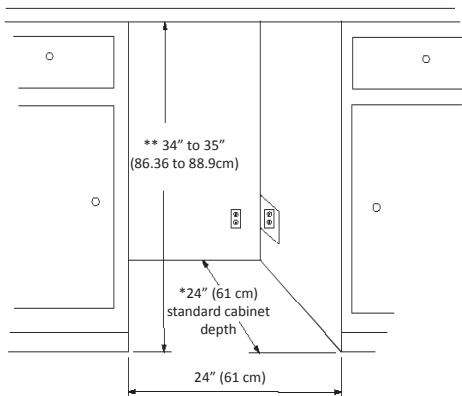

24" Refrigerator Freezer

Model # MS24RFS2RW

- Front-vented, permitting it to be built into casework or installed under lab benches without the need for additional ventilation clearance
- Knob-type electronic thermostat for selection of set point temperature is located in the toe-space grille below the door
- Accurate temperature control of contents within +3°/-3°C of set point.
- Recommended ambient temperature 18.3°C to 32.2°C (65°F to 90°F)
- Non-CFC 245FA blown foam insulation in cabinet walls and door, seals in the cold
- 22 gauge textured steel cabinet
- Solid door configurations have a "box style" textured steel exterior and three interior door shelves and a discrete top edge mounted door handle
- 4.4 cu.ft.of refrigerator space and 1.4 cu.ft. of freezer space
- Forced air condenser system efficiently removes heat and allows this unit to be built into casework without the loss of cooling performance
- Powerful compressor for fast pull-down time and temperature recovery after door opening or commodity loading
- Two adjustable and removable wire shelves
- "Box Style" door for easy mounting of inventory management system hardware
- Cam-assisted door close hinge system to reduce "door-ajar" events
- 4 Leveling legs for easy height adjustment
- Extra-long, jacketed commercial power cord with hospital grade plug to meet stringent hospital and clinical use standards
- Durable white powder coat paint finish standard
- Commercial UL Listed and warrantied for commercial use
- Probe port in cabinet wall for convenient central temperature monitoring probe installation
- Built-in door lock for secure storage

Product Dimensions

